



4mm Stackable Plug

Part Number:- 128005
 Standard Colours. Red Black Green Blue Yellow White
 Features Accepts cable up to 4.5 mmØ.

IEC 61010 Rating.
 Measurement Category. 1000V CAT III/600V CAT IV
 Current Rating. 20 Amp
 Insulation Category. Double/Reinforced.
 Pollution Degree. Two (2)

Silvertronic confirm that the product(s) listed have been designed, manufactured and tested to and are therefore fully compliant to:

IEC 61010-031:2015. (International CB Scheme).

EN 61010-031:2015. (European).

UL 61010-031, 2nd Edition. (United States).


CSA C22.2 No 61010-031, 2nd Edition (Canada).

All products marked/labelled as per IEC requirements. UL and CSA labelling upon request.


All testing carried out by independent third party test house and CB Test Laboratory,

MET Laboratories Inc. Baltimore MD 21230 USA

The product(s) also meet the requirements of the Low Voltage Directive 2014/35/EU and where applicable comply with HSE GS.38.

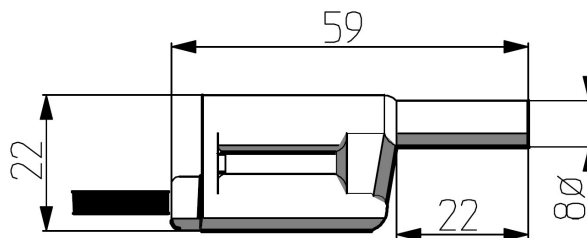

Assembly Instructions

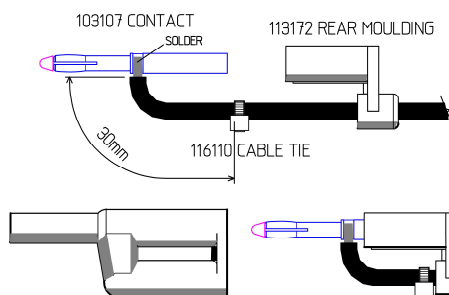

1. PREPARE END OF CABLE. STRIP BACK 5mm AND TIN WIRE.
2. THREAD CABLE THROUGH MOULDING 113172. N.B. CORRECT ORIENTATION.
3. SOLDER CABLE TO CONTACT 103107.
4. FIT CABLE TIE 116110 AT REQUIRED DISTANCE FROM CONTACT. THEN TRIM END.
5. ASSEMBLE CONTACT ASSEMBLY INTO MOULDING 113172 UNTILL SEATED.
6. PUSH FIT ASSEMBLY INTO FRONT MOULDING 113171. CHECK FOR PROPER LATCHING.

